

# **Component Procedures: Center Mounted Brake Lamp**


## **Table of Contents**

1. High Mounted Stop Lamp - Repair Procedures (Article 44643)

## Component Procedures: Center Mounted Brake Lamp

### High Mounted Stop Lamp - Repair Procedures (Article 44643)

- Removal
- Disconnect the negative (-) battery terminal.
- Remove the rear package tray trim. (Refer to Body - "Rear Package Tray Trim")
- Remove the high mounted stop lamp assembly (A) after loosening the mounting nuts.

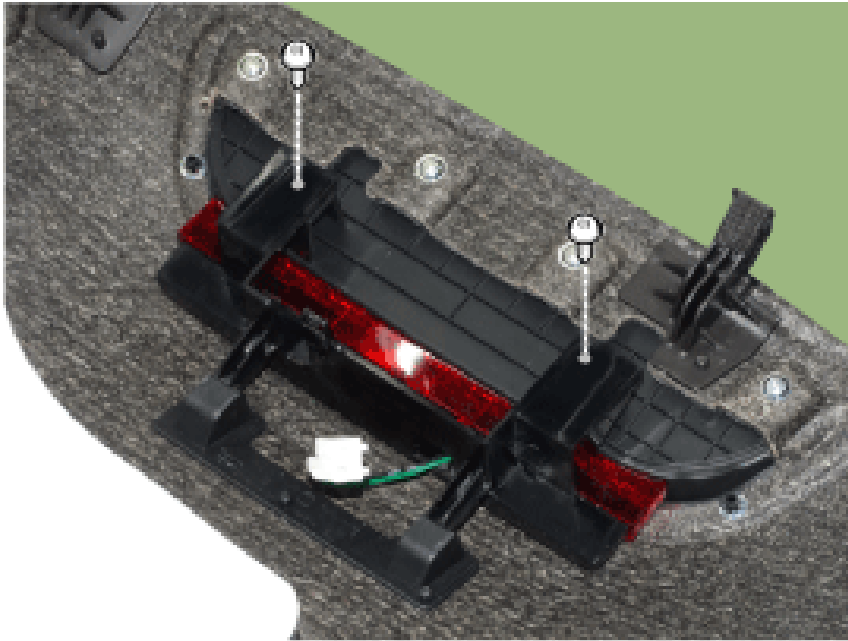

- Installation
- Install the rear high mounted stop lamp .
- Install the package tray trim.
- Connect the negative (-) battery terminal.