

Component Procedures: Rear Shelf



Table of Contents

1. Rear Package Tray Trim - Components and Components Location (Article 45035)
2. Rear Package Tray Trim - Repair Procedures (Article 45036)

Component Procedures: Rear Shelf

Rear Package Tray Trim - Components and Components Location (Article 45035)

- Component Location

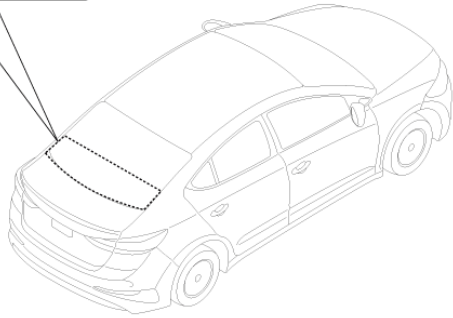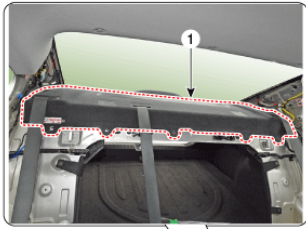

1. Package tray trim

Rear Package Tray Trim - Repair Procedures (Article 45036)

- Replacement

Put on gloves to prevent hand injuries.



- Put on gloves to prevent hand injuries.

When removing with a flat-tip screwdriver or remover, wrap protective tape around the tools to prevent damage to components. Use a plastic panel removal tool to remove interior trim pieces without marring the surface.

Take care not to bend or scratch the trim and panels.




- When removing with a flat-tip screwdriver or remover, wrap protective tape around the tools to prevent damage to components.

- Use a plastic panel removal tool to remove interior trim pieces without marring the surface.


- Take care not to bend or scratch the trim and panels.

- Remove the rear seat cushion assembly. (Refer to Rear Seat - "Rear Seat Assembly")


- Remove the rear seat back assembly. (Refer to Rear Seat - "Rear Seat Assembly")
- Slightly remove the rear door weatherstrip .
- Remove the rear door scuff trim. (Refer to Interior Trim - "Door Scuff Trim")
- Remove the rear pillar trim. (Refer to Interior Trim - "Rear Wheel House Trim")
- Loosen the clips and screws, remove the luggage partition side trim (A).

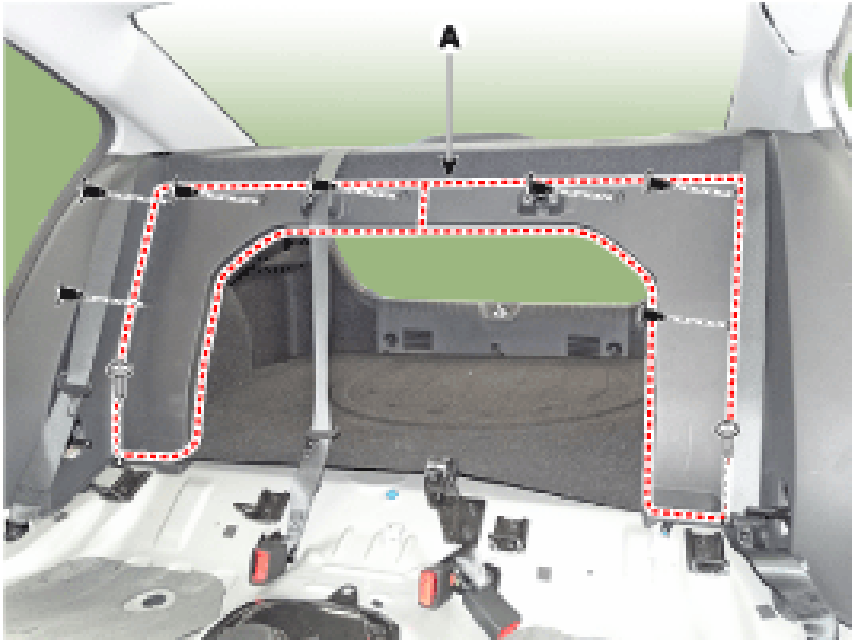


- Using a screwdriver or remover, remove the rear wheel house trim (A).

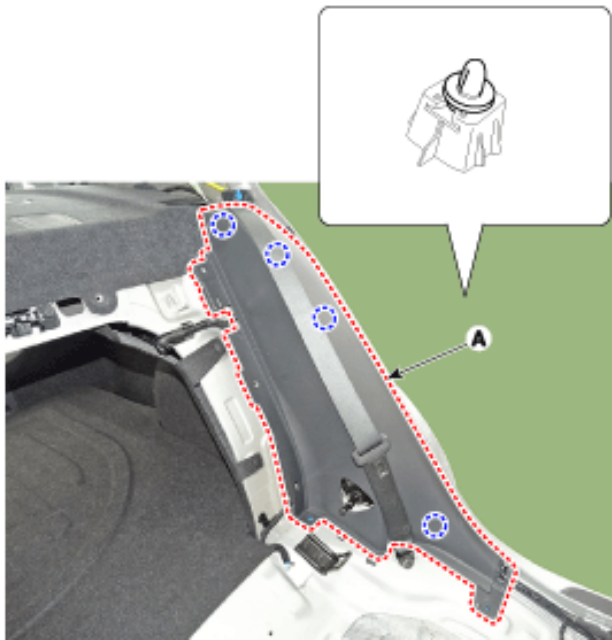

- After loosening the mounting bolt, remove the rear seat belt lower anchor (A). Tightening torque : 39.2 - 53.9 N.m (4.0 - 5.5 kgf.m, 28.8 - 39.8 lb-ft) [Side] [Center]

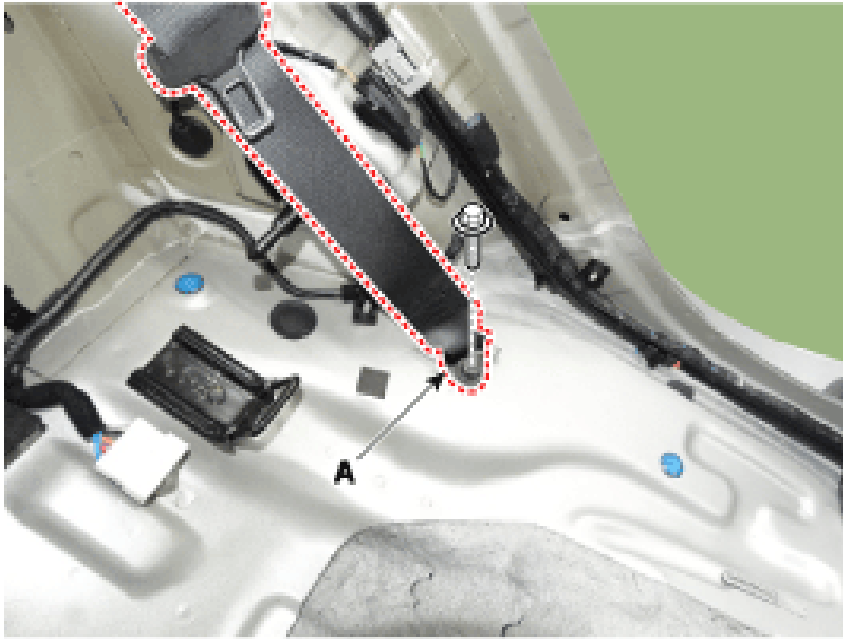

- Using a screwdriver or remover, remove the package tray trim (A).

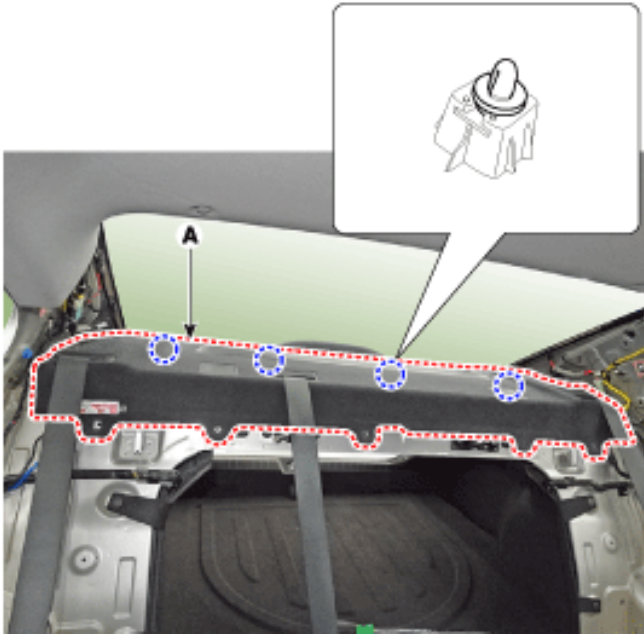

- To install, reverse the removal procedure. Replace any damaged clips (or pin-type retainers).
Replace any damaged clips (or pin-type retainers).



Information

- Replace any damaged clips (or pin-type retainers).