

Component Procedures: Rear Fender Liner

Table of Contents


1. Rear Mud Guard - Repair Procedures (Article 44982)
2. Rear Wheel Guard - Repair Procedures (Article 44980)

Component Procedures: Rear Fender Liner

Rear Mud Guard - Repair Procedures (Article 44982)

- Replacement

Put on gloves to prevent hand injuries.

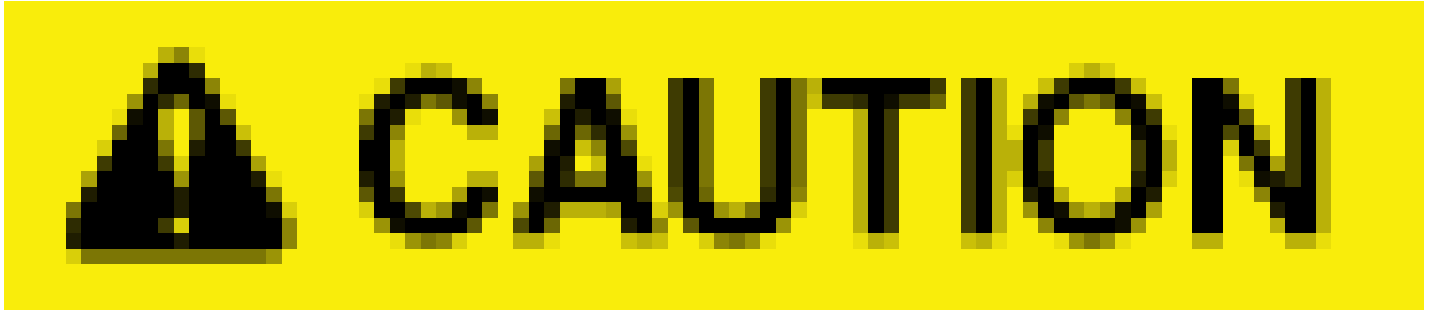

- Put on gloves to prevent hand injuries.


When removing with a flat-tip screwdriver or remover, wrap protective tape around the tools to prevent damage to components. Take care not to scratch the body surface.




- When removing with a flat-tip screwdriver or remover, wrap protective tape around the tools to prevent damage to components.

- Take care not to scratch the body surface.

- After loosening the mounting screws and remove the rear mud guard (A).

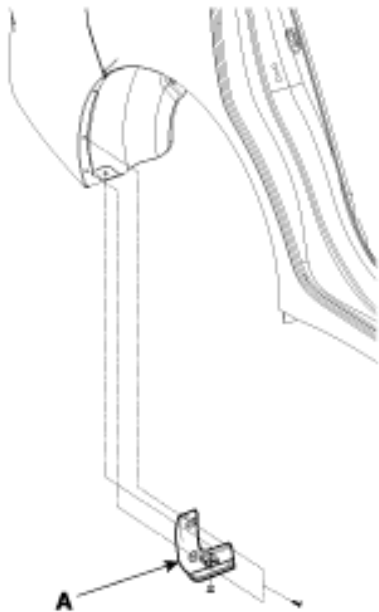

- To install, reverse the removal procedure. Replace any damaged clips (or pin-type retainers).
Replace any damaged clips (or pin-type retainers).

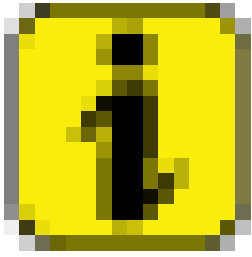

Information

- Replace any damaged clips (or pin-type retainers).

Rear Wheel Guard - Repair Procedures (Article 44980)

- Replacement

Put on gloves to prevent hand injuries.




- Put on gloves to prevent hand injuries.

When removing with a flat-tip screwdriver or remover, wrap protective tape around the tools to prevent damage to components. Take care not to scratch the body surface.



- When removing with a flat-tip screwdriver or remover, wrap protective tape around the tools to prevent damage to components.
- Take care not to scratch the body surface.
- Remove the rear tire.
- After loosening the mounting screws, clips and nut, remove the rear wheel guard (A).

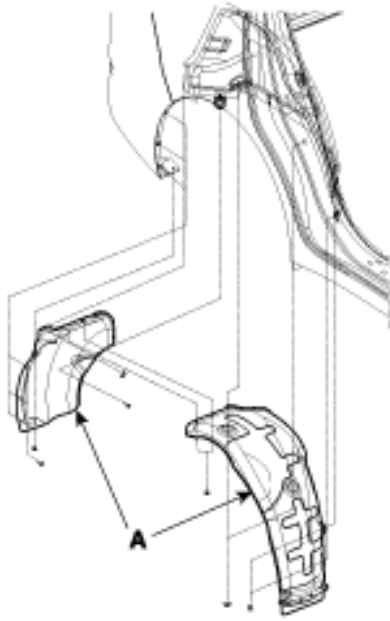

- To install, reverse the removal procedure. Replace any damaged clips (or pin-type retainers).
Replace any damaged clips (or pin-type retainers).



Information

- Replace any damaged clips (or pin-type retainers).