

# **Component Procedures: Upper Side Moulding / Trim**

## **Table of Contents**

1. Delta Garnish - Repair Procedures (Article 44978)

## Component Procedures: Upper Side Moulding / Trim

### Delta Garnish - Repair Procedures (Article 44978)

- Replacement

Put on gloves to prevent hand injuries.



- Put on gloves to prevent hand injuries.


When removing with a flat-tip screwdriver or remover, wrap protective tape around the tools to prevent damage to components. Take care not to scratch the body surface.




- When removing with a flat-tip screwdriver or remover, wrap protective tape around the tools to prevent damage to components.

- Take care not to scratch the body surface.

- Using a screwdriver or remover, remove the delta garnish (A).

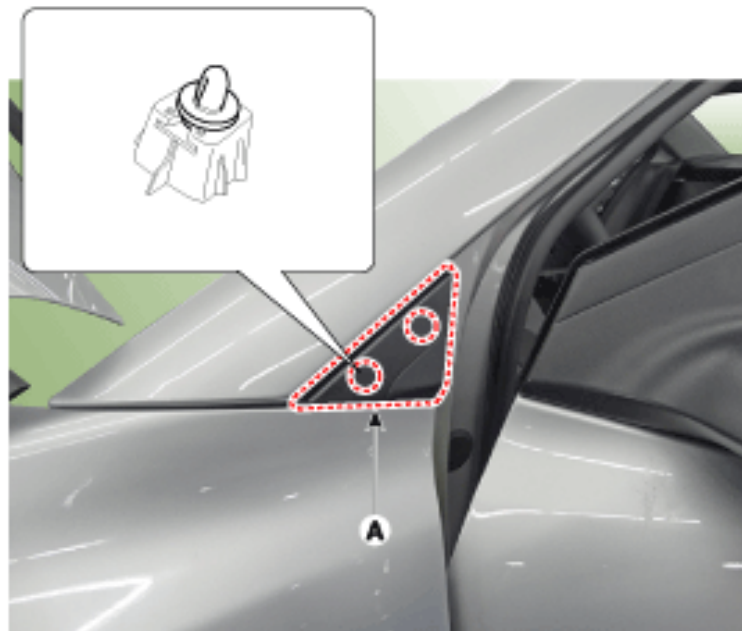

- To install, reverse the removal procedure. Replace any damaged clips (or pin-type retainers).  
Replace any damaged clips (or pin-type retainers).

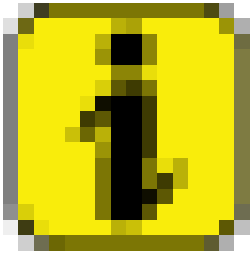

# Information

- Replace any damaged clips (or pin-type retainers).